
## SELF-DUMPING STEEL HOPPER W/ BUMPER RELEASE - D-300-MD APPROX WEIGHT: 940.02 lbs.

DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

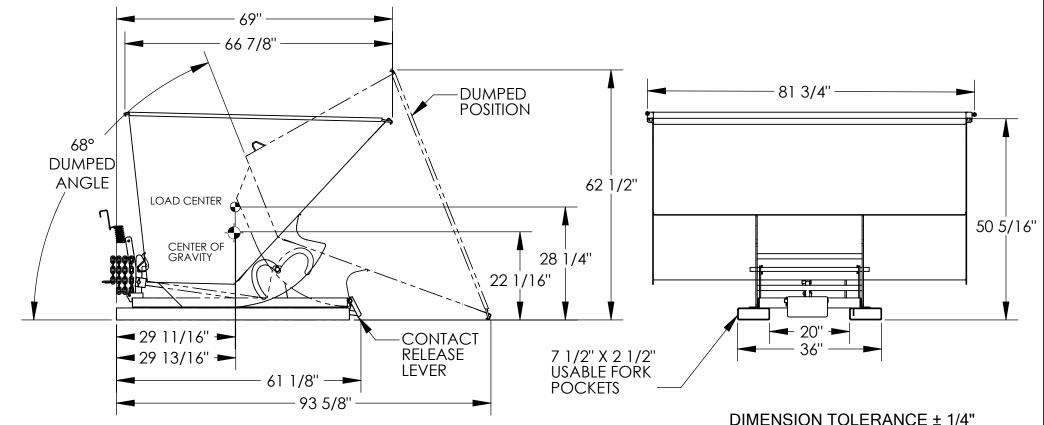

## STANDARD FEATURES

MODEL NUMBER: D-300-MD VOLUME: 3 CU. YDS. CAPACITY: 4,000 LBS. OVERALL WIDTH: 81 3/4" OVERALL LENGTH: 69" OVERALL HEIGHT: 50 5/16"

OVERALL HEIGHT: 50 5/16"
PULL CABLE IS AT LEAST: 48"
TOUGH BAKED IN POWDER

COATED BLUE FINISH

NONE

## SPECIAL FEATURES

\*\*\*ADDITION OF CASTERS MAY CHANGE WEIGHT

CAPACITY BASED ON CASTER RATING\*\*\*

NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK MANUFACTURER'S GUIDELINES.
DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.
APPROX. WEIGHT/ LOST LOAD=940.02 LBS.
MINIMUM EFFECTIVE THICKNESS= LESS THAN 1"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
REPRESENTED SATISFIES DESIGN AND DIMENSION
REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
CONFIRM PRODUCT AND INSTALLATION
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABL

## ANY MODIFIED UNITS ARE NON-RETURNABLE [ ] As drawn [ ] As marked

Signed:

Printed Name:

Α

Ρ

Ρ

R

0

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING
DISTRIBUTOR'S NAME:

P.O. #

PROJECT SIGN OFF VESTIL MANUFACTURING

VESTIL MANUFACTURING

DRAWN BY: W. STALEY

PATE: 5/7/08

REFERENCE: X

SCALE: 1:24

SCALE: 1:24

SCALE: 1:24

SCALE: 1:24

SCALE: 1:24

FAB.

REFI

QUO

**SALES** 

ENG.

QUOTED LEAD TIME: X QUOTE #

37-007-027

Date: